



THE GREEN GENERATION OF PEDESTRIAN DOOR AUTOMATIONS

With only Brushless motors in direct drive and extended range power supply
100-240 V (50/60 Hz) Switch Mode technology



THE FIRST ENERGY SAVING AUTOMATIONS THAT REDUCE ENERGY CONSUMPTION BY OVER 50%



EFFICIENT

Face automations reduce energy consumption by 50%*. This extraordinary result has been achieved by the switch mode technology and by the elimination of the gearbox thanks to the direct connection between the brushless motor and the belt.

SILENT

The configuration without motor gear, the specific design of the profile and of the carriage wheels guarantee the maximum level of silence.

RELIABLE AND WITH LOW MAINTENANCE COSTS

Reliability has been maximized: the motor works at low speed so it is not subject to wear, supercapacitors have a lifespan seven times longer than standard batteries, the encoder is protected inside the motor shell and the motor-gear is simply not present at all.

USER-FRIENDLY AND EASY TO INSTALL

Everything has to be as simple as possible: the mechanical installation, the fixing sensor device, the integrated display, the USB connection for the firmware update, the upload/download of the settings, the configurable terminals and the remote-control system.

EMERGENCY REDUNDANT VERSION


A redundant system with a double winding direct drive motor and an additional emergency card make FACE automations suitable for escape routes, in compliance with EN16005.



Direct drive brushless motor




Supercapacitor opening device

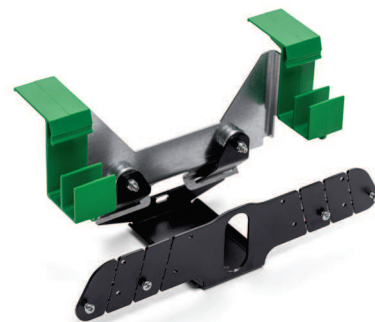

Sensor fixing device

*Tests performed comparing a SL5 double-leaf sliding door with a traditional automation with CC brush motor, gear reduction and a traditional transformer.

SWING DOOR SW5

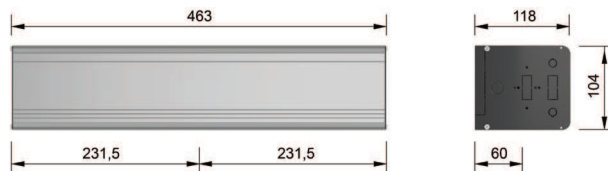

VERSATILE

SW5 is extremely versatile and suitable for all types of installations.

EFFICIENT

The brushless motor and electrical feeding with switch mode technology make **SW5** very efficient. The brushless motor is covered by a 5-year warranty and the automation is tested for 5 million cycles.

A POWERFUL CONTROL

The control includes as standard a wide range of native functions, an integrated display, configurable terminals, a USB port and a remote control interface.

	SW5
Dimensions (mm):	104 x 118 x 463
Max load (kg):	300 x 0.8 m
Opening/closing time (s)	2 - 6
Service class	Continuous operation
Power supply:	100 - 240 V 50/60 Hz
Power (W)	70
Stand-by (W)	8
Rated load (N)	40
Degree of protection	IP20
Operating temperature (°C)	-15 / 50
Accessory output	12 Vdc (1 A) 24 Vdc (0.5 A)
Firmware update	Standard USB / Micro SD

SW5 is the Heavy version of swing door automations with motor-driven opening and closing. It is a very versatile and efficient automation that can be used for indoor and outdoor installations.

SW5 is suitable for many types of installation and it is available with three types of arm:

- Sliding to pull
- Sliding to push
- Articulated to push.

Running parameters can be set on “low energy” mode for all the installations that don’t include safety sensors.

